

Customer Number: \_\_\_\_\_ Customer Name: \_\_\_\_\_

Township: **Wilson**

**SE¼ NW¼, NE¼ SW¼ S12-T35N-R5E**

Bond Info: **Bond Amount(25% of bid)\$** \_\_\_\_\_

Choose method by which performance bond will be posted or secured.

Please check (✓) one:  Cash or Check  Irrevocable Letter of Credit

Approximate cutting area: **17 acres**

Product Species		Estimated Unit Volume	Minimum Bid Per Unit	Estimated Value	Bid Per Unit	Total
20-TMX Mixed Hardwood Pulp	Tons	640.00	7.80	4,992.00	_____	_____
10-MX Mixed Hardwood Sawlogs	MBF	6.00	105.00	630.00	_____	_____
Total estimated value of accepted bid				<b>5,622.00</b>	_____	_____
Bidder's Signature _____					Date _____	<b>Total Bid</b>

**CONTRACT AVAILABLE FOR INSPECTION**

1) Overstory Removal Area: Harvest all trees greater than 1-inch in diameter except for non-merchantable aspen, yellow birch, oak, butternut, spruce, tamarack, pine, cedar, cherry, hemlock, balsam fir, apple, & hawthorn. Non-Merchantable trees must be cut concurrent with the harvest of merchantable trees. DO NOT skid through, drop trees into, or drag tops through seedlings & saplings. Trees must be directionally felled into the harvester path & limbed/topped in the same path. Harvesting must be done in a grid pattern w/ the harvester & forwarder following the same path. No "Drive-to-tree" type hotsaws allowed. Do not cut non-merchantable trees in low wet areas and drainages. Avoid damage to residual trees. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.

2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.

3) Any roadwork will require prior approval from the Lincoln County Forestry Department and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.

4) Ingress and egress to this sale is the responsibility of the contractor.


5) Gates/Berms removed or damaged by the contractor must be restored to original or better condition when the sale becomes inactive and upon sale completion.

6) This sale is limited to short wood skidding only.

7) Do not operate equipment within 15 feet of any wetland or ephemeral pond unless the ground is firm or frozen.

8) All spring poles (saplings tipped over from harvesting operations) will be cut at the base.

9) Mixed hardwood pulp weight estimate is approximately: 12% White Birch. Mixed hardwood sawlog volume estimate is approximately: 59% soft maple; 33% hard maple & 7% white birch.

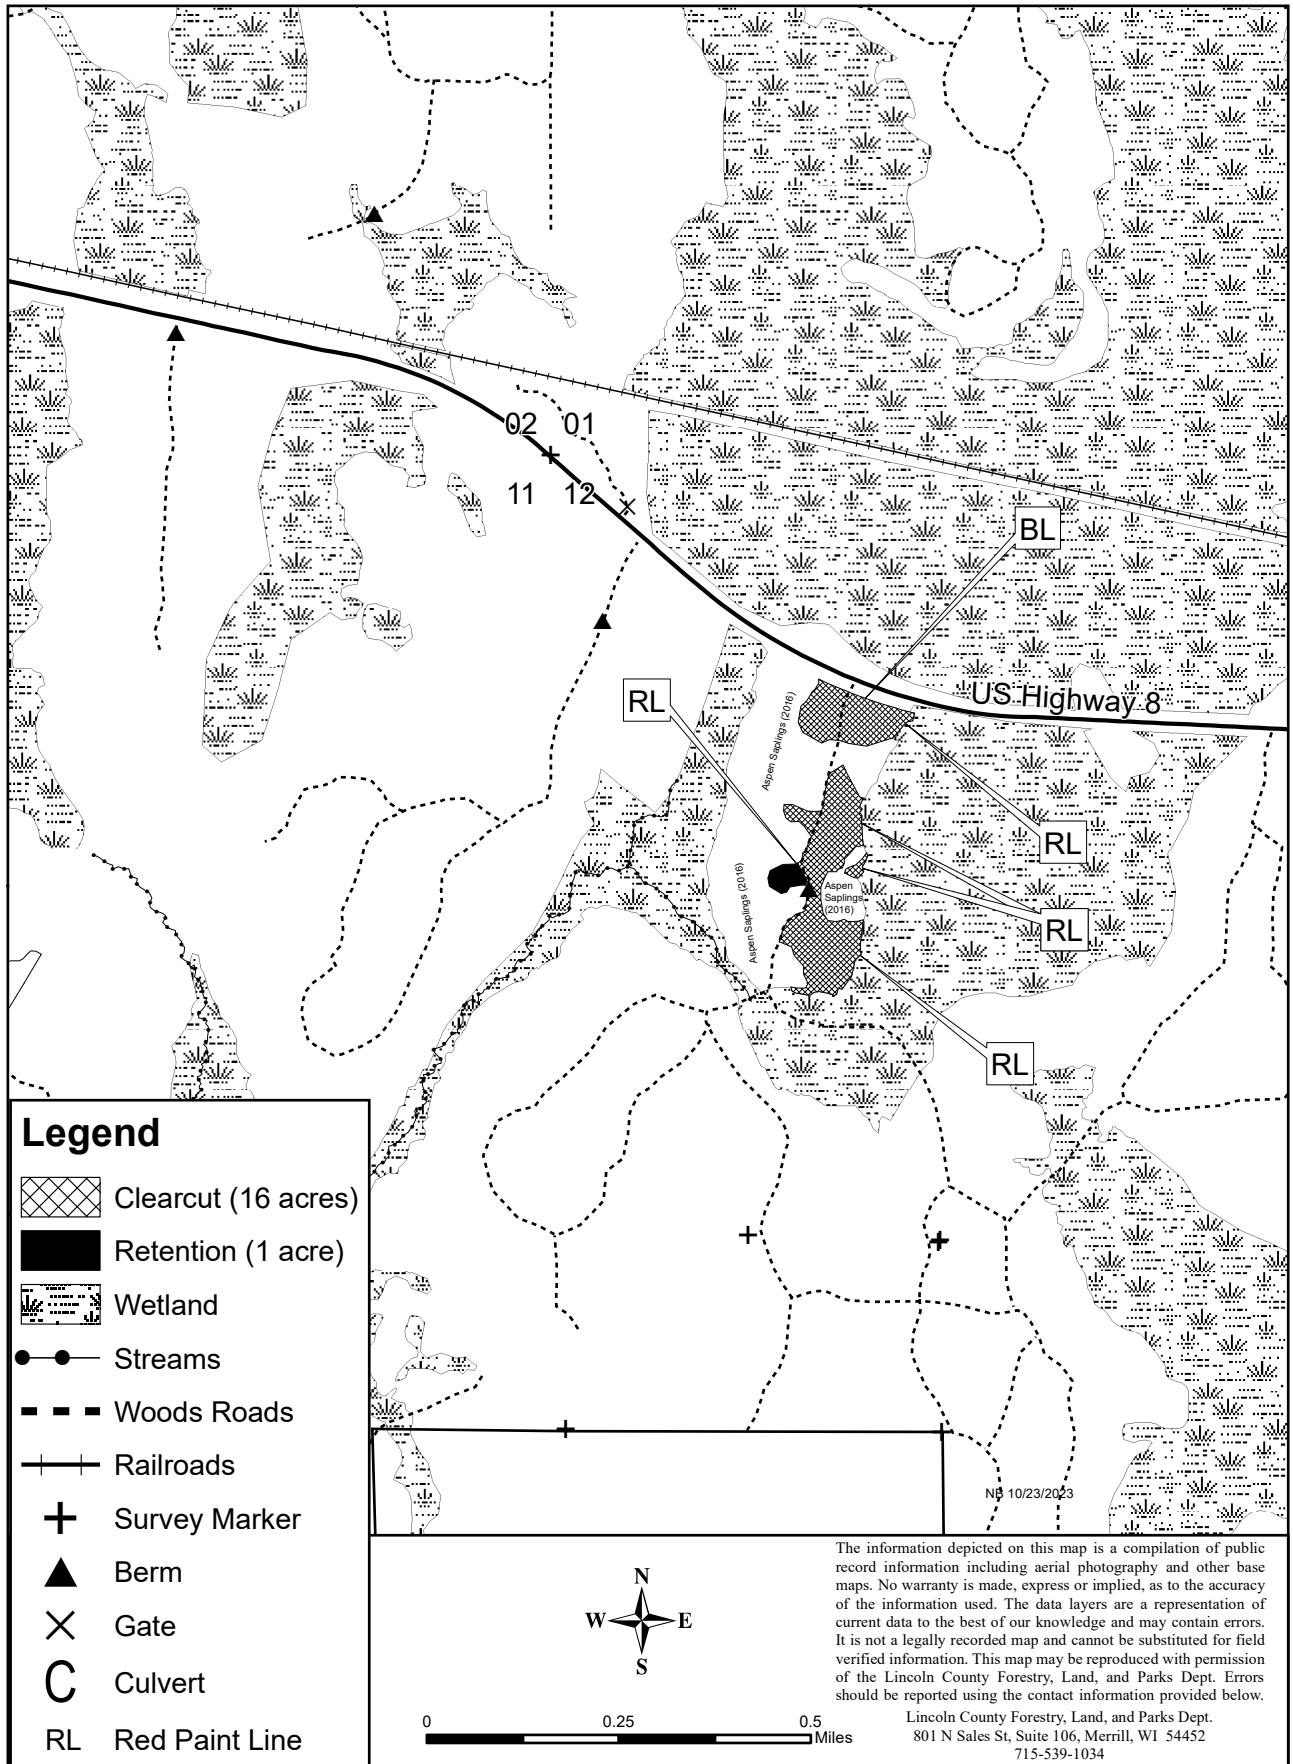

T003-24