Customer Number:

Township: Harrison(S)

NE¼, NE¼ SE¼ S20-T34N-R8E; W½ NW¼, NW¼ SW¼ S21-T34N-R8E

Bond Info: Bond Amount(25% of bid)\$____

Choose method by which performance bond will be posted or secured.

Please check (\checkmark) one: Cash or Check Irrevocable Letter of Credit

Customer Name:

Approximate cutting area: 98 acres Product Species			Estimated Unit Volume	Minimum Bid Per Unit	Estimated Value	Bid Per Unit	- Total
20-TA	Aspen Pulp	Tons	70.00	8.10	567.00		
20-TMX	Mixed Hardwood Pulp	Tons	2,150.00	10.00	21,500.00		
20-TBA	Basswood Pulp	Tons	500.00	2.00	1,000.00		
10-MX	Mixed Hardwood Sawlogs	MBF	25.00	135.00	3,375.00		
10-BA	Basswood Sawlogs	MBF	40.00	117.00	4,680.00		
10-MH	Hard Maple Sawlogs	MBF	60.00	230.00	13,800.00		
		Total estimated value of accepted bid 44,922.00					
Bidder's Signature			Date			_	Total Bid

CONTRACT AVAILABLE FOR INSPECTION

1) Shelterwood area: cut all living trees > 1 inch in diameter except for aspen and yellow paint marked trees. This area is identified by a single green painted line facing into the shelterwood area. **Designated area:** cut all aspen, all ironwood and merchantable ash containing 2 or more pulp sticks. This area is identified with a double green painted line facing into the shelterwood area. **Selection harvest area:** cut all ironwood, all merchantable aspen, all balsam fir and orange paint marked trees. Avoid damage to residual trees. Snags and dead trees are only to be cut if leaving them standing presents a safety hazard to the harvesting operation. Snags and dead trees cut for safety reasons must be left in the harvest area and may not be utilized.

2) All logging damage/debris must be corrected/removed from trails, woods roads, and grass openings daily and prior to sale closure. Slash will be left where it falls unless the contractor wishes to use it to prevent ruts, soil compaction and erosion during logging operations.

3) Any roadwork will require prior approval from the Lincoln County Forestry Depart. and must follow BMP guidelines. Contractor is responsible for installing broad based dips, water bars and/or using other soil stabilizing techniques where appropriate.

4) Ingress and egress to this sale is the responsibility of the contractor.

5) Gates/Berms removed/damaged by the contractor must be restored to original or better condition when the sale becomes inactive and upon sale completion.

6) Wheeled or tracked equipment is prohibited in the restricted equipment zone (REZ), unless agreed upon in writing. Biomass harvesting within the REZ is prohibited.

7) All stump heights in the shelterwood and designated areas must be <6"

8) Special care must be taken to not damage or disturb survey markers.


9) Selection harvest area limited to short wood skidding only.

10) Special care must be taken to limit damage to advanced regeneration/Special care must be taken to limit damage to saplings. All spring poles (saplings tipped over from harvesting operations) will be cut at the base.

11) Do not operate equipment within 15 feet of any wetland or ephemeral ponds unless the ground is firm or frozen.

12) Mixed hardwood pulp weight estimate is approx.: 3% white birch & < 1% northern red oak. Mixed hardwood sawlog volume estimate is approx.: 94% white ash; 5% white birch; and, < 1% black ask & red maple. Hard maple sawlog volume estimate is approx.: 0.5% northern red oak.
13) Garlic Mustard has been found of trail and on the woods road system (See map). To help prevent the spread of garlic mustard, ground disturbance must be kept to a minimum in these areas. These areas must be cut last. Contractor must wash equipment prior to leaving the sale area.

Nisse-modus

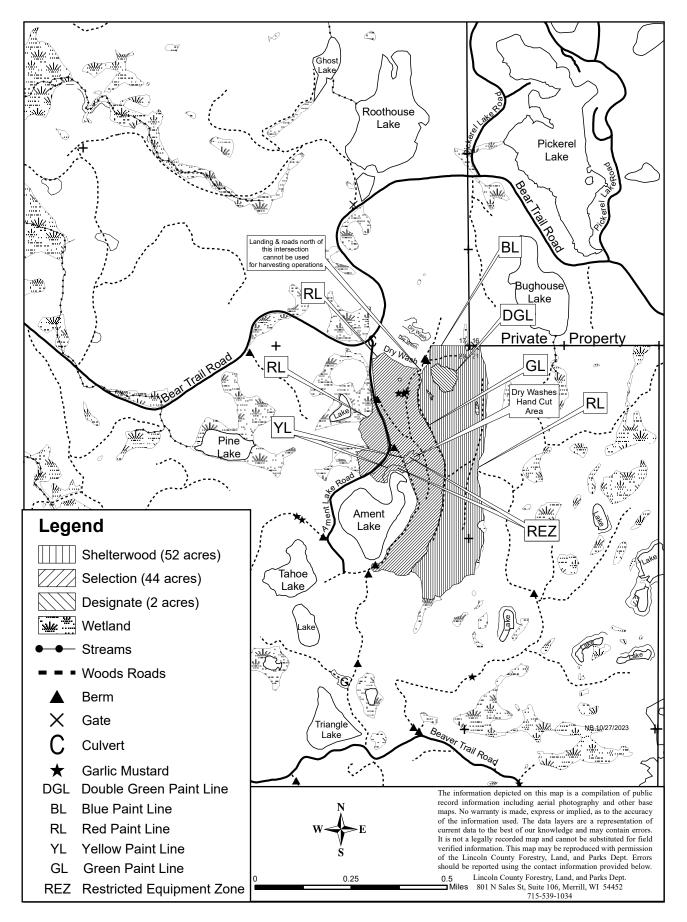

T004-24