

CONSTRUCTION PLAN

PRACTICE(S) WELL DECOMMISSIONING (351)

LANDOWNER JAMES BLANKENHEIM

SITE ADDRESS N11809 ROGER DR. TOMAHAWK, WI 54487

LANDOWNER PHONE NO. 715-966-4858 COUNTY LINCOLN

TOWNSHIP KING T 35 N, R 7 E, Sec. 4

FIELD OFFICE MERRILL TELEPHONE NO. 715-539-1054

DIGGERS HOTLINE

Call 3 Work Days  
Before You Dig!

Nationwide  
811

Toll Free  
1-800-242-8511

TDD  
1-800-542-2289

Website  
www.diggershotline.com



Not to  
Scale

LOCATION MAP

NOTICE TO LANDOWNERS AND EXCAVATORS

Any representation made by the USDA, Natural Resources Conservation Service, or the LINCOLN County LCD, as to the approximate location or nonexistence of above or under ground hazards does not relieve the owner of the property or the excavator that is hired to complete construction, from notifying Diggers Hotline of the pending construction. You will be liable for damages resulting from construction activities. Call Diggers Hotline! Ticket Number \_\_\_\_\_

CONSTRUCTION DRAWINGS AND SPECIFICATIONS ACCEPTANCE

I have reviewed and understand the construction plans and specifications and agree to complete the work accordingly. Failure to meet these plans and specifications may jeopardize any continued NRCS technical assistance or program cost sharing applied for. I understand that it is my responsibility to secure all necessary permits and licenses, and to complete the work in accordance with all local, state, and federal laws. Modification of these construction plans or specifications must be approved by the NRCS before installation. I assume all responsibility for negotiations and contract agreements with the construction contractors.

Landowner Signature: James Blankenheim Date: 02/29/2024

Designed by: THOMAS J. BOISVERT Date: FEBRUARY, 2024

Checked by: \_\_\_\_\_ Date: \_\_\_\_\_

Approved by: Drew D. Zelle Date: 2/28/24

The installed practices comply with applicable NRCS technical standards and specifications. The "redlined" construction plans (as-built drawings) reflect changes made during construction.

Construction Approved by: \_\_\_\_\_ Date: \_\_\_\_\_


Job Approval Class 1



**ESTIMATED QUANTITIES**

ITEM	UNIT	QUANTITY	SHEET NUMBER	WI. CONSTRUCTION SPEC. OR JOB SHEET NUMBER
BENTONITE CHIPS	50 LB BAG	24	4	WI. CONSTRUCTION SPEC 19
EARTH FILL (IF NEEDED)	CU. YARD	1	4	WI. CONSTRUCTION SPEC 3
PUMP REMOVAL	JOB	1	4	
CUT PIPE CASING MIN. 3 FT.	JOB	1	4	


Quantities are estimated to the neat lines and grades of in-place materials shown on the construction plan unless otherwise stated. Truck yardage, loose fill, shrinkage, etc., must be calculated and compensated for by the contractor preparing a bid or constructing the project.

LINCOLN COUNTY LAND SERVICES DEPARTMENT  801 N. SALES ST. MERRILL, WI 54452		<p align="center"><b>ESTIMATED QUANTITIES</b></p> CLIENT: <u>JAMES BLANKENHEIM</u> COUNTY: <u>LINCOLN</u>	Designed <u>TJB FEBRUARY, 2024</u> Drawn <u>TJB FEBRUARY, 2024</u> Checked _____ Approved _____	File Name <u>WI-005A</u> Date <u>08/14</u> Sheet 2 of 4
--	---	--	--	---


## CONSTRUCTION NOTES

1. A pre-construction meeting shall be scheduled with County personnel, the contractor, and the landowner prior to construction start-up.
  2. The contractor and/or landowner shall notify the County at least 3 days prior to start-up of construction.
  3. Before the well is filled and sealed, the pump and its associated piping, any ungrouted liner pipe, or other obstacles must be removed from the well. If debris has been thrown in the well, a well driller may have to first drill it out. After the well is cleared, it must be filled from the bottom up with neat cement grout, sand-cement grout, concrete or approved bentonite chips.
- NOTE: This plan highlights bentonite chips to be used as the fill material. If other material is to be used, notify Lincoln County Land Services Department at 715-539-1054 for confirmation.
4. Except when using bentonite chips, a well driller or pump installer may not just pour or dump the filling material into the well without the use of a conductor pipe because this could cause the filling material to become diluted or bridge in the well part-way down. If dilution occurs, the fill material will not be impermeable. If bridging occurs, the well will only get partially filled.
  5. After properly filling and sealing the well, the filling material may terminate a minimum of 3 feet below the existing ground surface. The remaining casing can be cut to this level.
  6. Use clean fill to gently slope the area over the filled well. Ensure that ponding will not occur over the closed well. Runoff should be directed away from the closed well.
  7. Establish and maintain a grass cover over the abandonment site.
  8. Well filling and sealing reports must be used to report how the well was filled and sealed and document that the well no longer exists. The licensed person performing the well filling and sealing work MUST complete and submit the form ONLINE.

[dnr.wi.gov/warsreport/report](http://dnr.wi.gov/warsreport/report)

LINCOLN COUNTY LAND SERVICES DEPARTMENT		<b>CONSTRUCTION NOTES</b>	Designed <u>TJB</u> <u>FEBRUARY, 2024</u>	File Name
			Drawn <u>TJB</u> <u>FEBRUARY, 2024</u>	Date
801 N. SALES ST. MERRILL, WI 54452		CLIENT: <u>JAMES BLANKENHEIM</u>	Checked _____	08/14
			COUNTY: <u>LINCOLN</u>	Approved _____



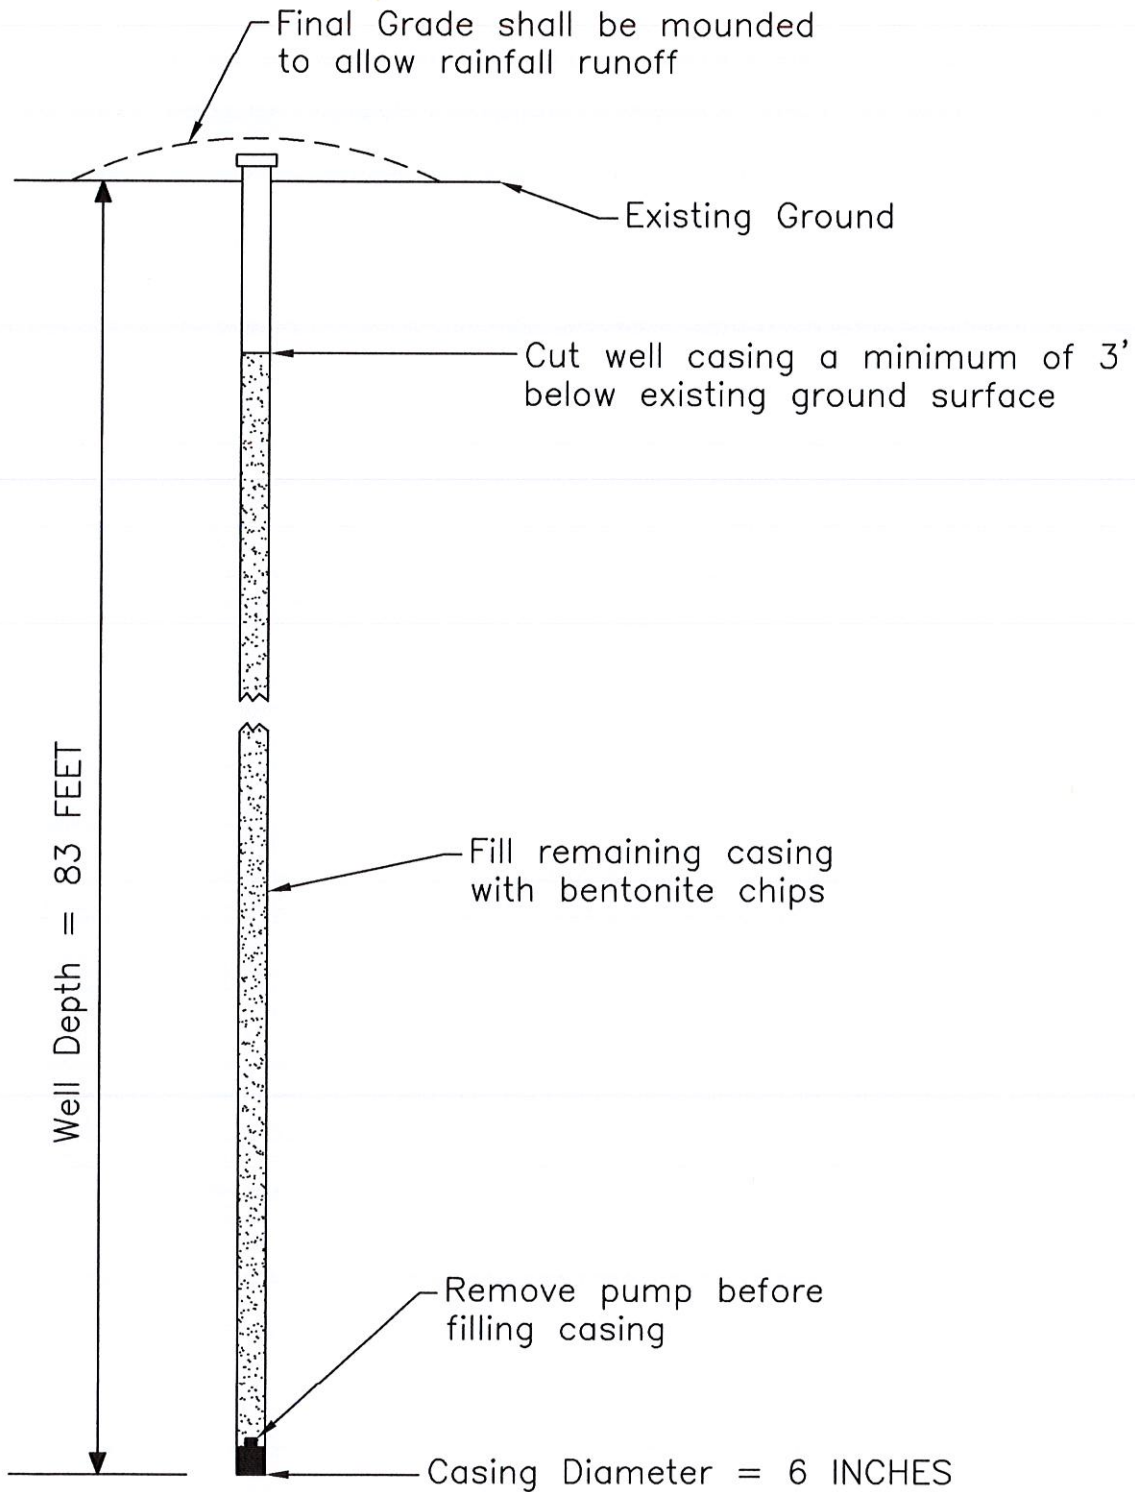

LINCOLN COUNTY  
LAND SERVICES  
DEPARTMENT

801 N. SALES ST.  
MERRILL, WI 54452



PLAN VIEW

CLIENT: JAMES BLANKENHEIM

COUNTY: LINCOLN

Date

Designed TJB FEBRUARY, 2024

Drawn TJB FEBRUARY, 2024

Checked \_\_\_\_\_

Approved \_\_\_\_\_

File Name

WI-002

Date

08/14

Sheet 4 of 4

OPERATIONS AND MAINTENANCE PLAN

COOPERATOR: James Blankenheim

BY: Thomas J. Boisvert TITLE: Conservation Program Manager

Project Location: N11809 Roger Dr. Tomahawk, WI 54487

The landowner agrees to the following for the next ten (10) years:

1. Inspect the job site periodically to ensure there is no ground settlement, or otherwise adversely disturbed.
2. Maintain the site in a manner that prevents ponding or surface runoff towards the site.


James Blankenheim  
Cooperator's Signature

02/29/2024  
Date

Thomas J. Boisvert  
Conservationist's Signature

3/1/24  
Date

I have discussed the maintenance guidelines with the above cooperator.

LINCOLN COUNTY LAND SERVICES DEPARTMENT  801 N. SALES ST. MERRILL, WI 54452		<b>OPERATIONS &amp; MAINTENANCE PLAN</b>	Date	
			Designed <u>TJB FEBRUARY, 2024</u>	File Name
			Drawn <u>TJB FEBRUARY, 2024</u>	Date
			Checked _____	08/14
CLIENT: <u>JAMES BLANKENHEIM</u>	COUNTY: <u>LINCOLN</u>	Approved _____	Sheet 1 of 1	

QUALITY ASSURANCE PLAN

COOPERATOR: James Blankenheim

BY: Thomas J. Boisvert TITLE: Conservation Program Manager

Project Location: N11809 Roger Dr. Tomahawk, WI 54487


- \_\_\_ Diggers Hotline has been contacted before any ground disturbance.
- \_\_\_ Verify that appropriate quantity of fill material was used (a lesser amount may indicate bridging or dilution).
- \_\_\_ Verify that the well casing has been cut at least 3 feet below the existing ground surface.
- \_\_\_ Verify that well filling and sealing report is entered into the state database.
- \_\_\_ Verify that water will not pond and runoff is directed away from site.
- \_\_\_ Verify that the site has been seeded with a perennial, native, grass cover.

James Blankenheim  
Cooperator's Signature

02/29/2024  
Date

Thomas J. Boisvert  
Conservationist's Signature

3/1/24  
Date

LINCOLN COUNTY LAND SERVICES DEPARTMENT  801 N. SALES ST. MERRILL, WI 54452		QUALITY ASSURANCE PLAN		Date	File Name	
				CLIENT: <u>LINCOLN COUNTY – FORESTRY DEPT.</u>		Designed <u>TJB FEBRUARY, 2024</u>
		COUNTY: <u>LINCOLN</u>		Drawn <u>TJB FEBRUARY, 2024</u>	Checked _____	08/14
				Approved _____		Sheet 1 of 1